



REMOTE DISPLAY


Allows you to monitor critical conditions of operation and execute fresh water flushes.



COMMERCIAL PRE-FILTER

Standard feature on 1,200 and 1,800 GPD units; and, a no-cost upgrade for lower output systems when chosen at the time of order.

FRAMED DIMENSIONS

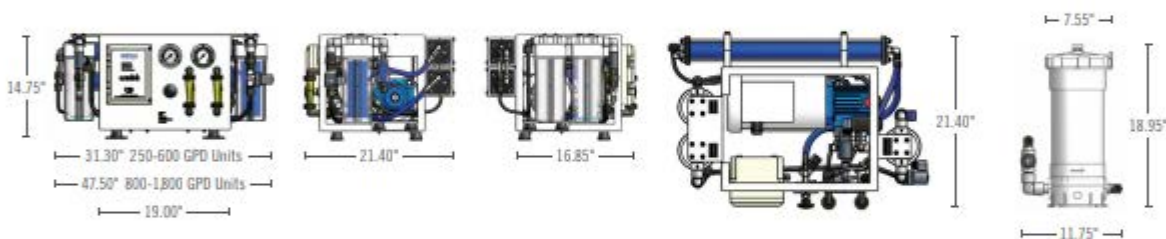

MODULAR DIMENSIONS



FRAMED/MODULAR	GPD/LPD	GPH/LPH	HP	KW	VOLTAGE
A216S / AM216S	250/946	10/39	1.5	1.52	120/220, 50/60 Hz
A516S / AM516S	500/1892	21/79	1.5	1.52	120/220, 50/60 Hz
A616S / AM616S	600/2270	25/95	1.5	1.52	120/220, 50/60 Hz
A816S / AM816S	800/3027	33/126	1.5	1.52	120/220, 50/60 Hz
A1226S / AM1226S	1200/4541	50/189	2.5	2.29	120/220, 50/60 Hz
A1826S / AM1826S	1800/6811	75/284	2.5	2.29	120/220, 50/60 Hz

NOTE: Ratings based on 77°F/25°C, 32,500 TDS Feed, at 800psi, 60 Hz.

50 Hz operation will affect system performance. Contact factory for other voltages.